


Sensor Chip CM3

Product description

- Order code: BR-1005-41 (package of three sensor chips)
- Storage: The use-before date applies to chips stored at +2 to 8°C in unopened pouches.

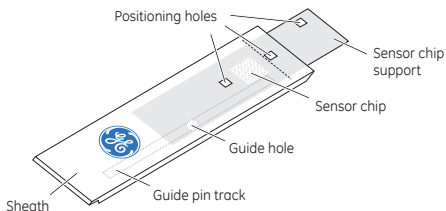

The sensor chip is fixed to a polystyrene support sheath. Each cassette, consisting of a sensor chip and sheath assembly, is individually packed under a nitrogen atmosphere in a sealed pouch.

Note: For *in vitro* use only.



Application areas

Sensor Chip CM3 is designed for interaction analysis in Biacore systems. The surface has a carboxymethylated dextran matrix covalently attached to a gold film. Ligands ranging from small molecules to proteins, nucleic acids and carbohydrates may be attached via covalent coupling using well-established chemistries. Alternatively, a capturing molecule can be coupled for subsequent capture.

Sensor Chip CM3 has a shorter dextran matrix than Sensor Chip CM5. This may be an advantage for example in work with large molecules, such as virus particles or cells. Non-specific binding may also be reduced for some samples.

Due to the shorter matrix, immobilization levels will typically be around 30% of those obtained on Sensor Chip CM5 under comparable conditions.

Refer to www.gelifsciences.com/biacore for updates on applications and scientific publications.

Preparations for use

Step	Action
1	If you are working in a humid environment, allow the sealed sensor chip pouch to equilibrate at room temperature for 15 to 30 minutes in order to prevent condensation on the chip surface.
2	Prepare the Biacore instrument with running buffer. The buffer should be filtered (0.22 µm), and degassed for systems that do not have an integrated buffer degasser.
3	Open the sensor chip pouch. Make sure that the sensor chip support remains fully inserted into the sheath at all times to protect the chip from dust particles.
4	Dock the sensor chip in the instrument as described in the instrument handbook.
	Note: <i>Sensor chips that are not docked in the instrument should be stored in closed containers.</i>

Immobilizing the ligand

The ligand or capturing molecule is covalently bound to the sensor chip surface via carboxyl moieties on the dextran. Functional groups on the molecule that can be used for coupling include -NH_2 , -SH , -CHO , -OH , and -COOH .

Refer to *Biacore Sensor Surface Handbook* for more information on immobilization strategies and procedures.

Interaction analysis

Interaction analysis is performed by injection of samples over the sensor chip surface. The covalently immobilized ligand either participates directly in the interaction under study or is used for affinity capture of one of the interacting molecules.

Refer to Biacore handbooks and www.gelifesciences.com/biacore for details on experimental protocols and methodology.

Regeneration

Regeneration of the immobilized ligand may be performed by selective dissociation of the bound analyte. Conditions should be chosen to achieve complete dissociation of the analyte without affecting the binding characteristics of the ligand. The surface of Sensor Chip CM3 is resistant to a wide range of agents for this purpose (for more information see *Chemical resistance, on page 4*). The choice of regeneration procedure may be limited by the stability of the ligand.

Refer to *Biacore Sensor Surface Handbook* for more information on regeneration strategies.

Chemical resistance

The surface of Sensor Chip CM3 is resistant to one-minute pulses of many commonly used agents. See table below for information of common agents compatible with Sensor Chip CM3.

Agent	Concentration
Acetonitrile	30%
DMSO	10%
DTE	0.1 M
EDTA	0.35 M
Ethanol	70%
Ethanolamine	1 M
Ethylene glycol	100%
Formamide	40%
Formic acid	20%
Glycine pH 1.5 to 3.0	100 mM
HCl	100 mM
Imidazole	300 mM
MgCl ₂	4 M
NaOH	100 mM
NaCl	5 M
SDS	0.5%
Surfactant P20	5%
Urea	8 M

For local office contact information, visit
www.gelifesciences.com/contact

GE Healthcare UK Limited
Amersham Place
Little Chalfont
Buckinghamshire, HP7 9NA
United Kingdom

www.gelifesciences.com/sampleprep

GE, imagination at work and GE monogram are trademarks of General Electric Company.

Biacore is a trademark of GE Healthcare companies.

© 2004-2013 General Electric Company – All rights reserved.
First published Sep. 2004

All goods and services are sold subject to the terms and conditions of sale of the company within GE Healthcare which supplies them. A copy of these terms and conditions is available on request. Contact your local GE Healthcare representative for the most current information.

GE Healthcare Bio-Sciences AB
Björkgatan 30, 751 84 Uppsala, Sweden

GE Healthcare Europe GmbH
Munzinger Strasse 5, D-79111 Freiburg, Germany

GE Healthcare Bio-Sciences Corp.
800 Centennial Avenue, P.O. Box 1327, Piscataway, NJ 08855-1327, USA

GE Healthcare Japan Corporation
Sanken Bldg. 3-25-1, Hyakunincho Shinjuku-ku, Tokyo 169-0073, Japan



imagination at work

22-0607-28 AC 05/2013